


512 Channels DMX Scene Controller

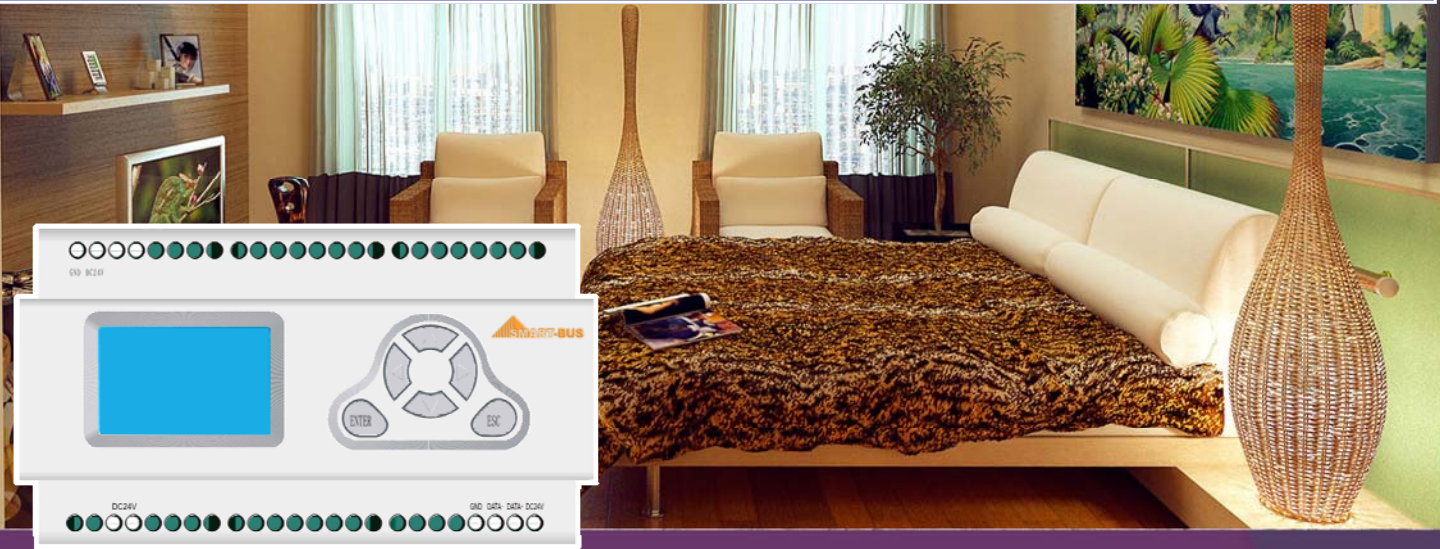

512 Channels DMX Scene Controller

512CH DMX Show Controller with embedded Ethernet port built in , bus connection and DMX512 port.

It is used to control 512 different DMX Channels, this can work together with the Touch Life screen or Multimedia show control software, synchronously with music and video play to give the lights Effect with the Video and sound .

Can be used in any location that require Stage lighting , Party halls, Multi Purpose room, bars Disco, Home theater.

FUNCTIONS & FEATURES :

- Up to 500 preset scenes, cue playing time ranging from 1.0s to 60 minutes.
- DMX , bus and Ethernet connection
- Two properties of gradually and right off are provided in each channel
- Can work as Bridge between S-BUS end Ethernet
- Up to 99 show sequences, 99 steps for each sequence, and 0.1s to 60 minutes interval between each step. Each show sequence has 4 running mode of "Forward", "Backward", "Bounce", "Random".
- Intelligent data interchange, to minimize the data flux
- Soft reset function without power interruption
- Electronic password lock to avoid non-liability modification
- DMX512 signal output (version 1990)
- Remote programming and management allowable
- Soft patching function

TECHNICAL SPECIFICATIONS:

Power Input: DC 8-32V DC from Bus

Power Consumption: 35mA/DC24V

Ambient Conditions:

Working Temperature: 0°C ~ +45°C

Working Relative Humidity: 20% - 90%

Storage Temperature: -40°C- +55°C

Storage Relative Humidity: 10% - 93%

DMX512 output Interface: 1990 version

Installation: standard 35mmDin rail mounting

Signal Interface: S-bus, Ethernet, DMX512